Flush Wall Mount Installation Guide

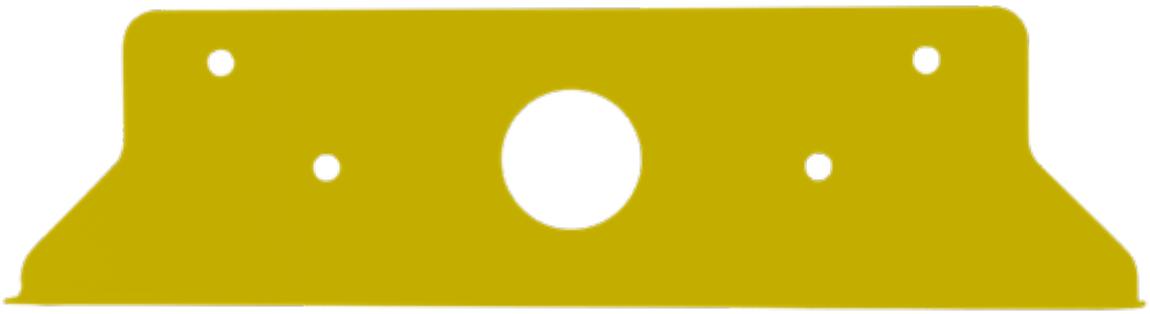

Included Hardware:

- (2) Flush mount brackets
- (8) 7/8” Length 3/8”- 16 hex screws
- (16) 3/8” Flat washers
- (8) 3/8” Locknuts

Recommended Tools:

- 9/16” Socket driver and box wrench
- 3/8” Socket driver or wrench
- Drill and impact driver

Step 1:

- Remove the back panel from Industrial Portal with 3/8” wrench
- Align the flush mount installation holes over the Industrial Portal

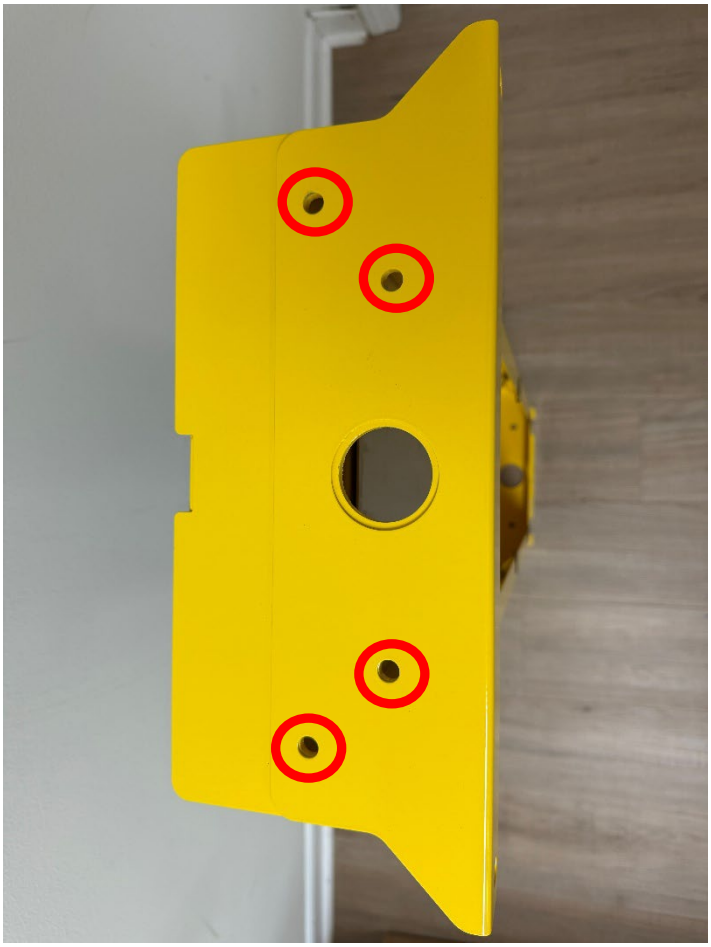

Step 2:

- Install the (4) 7/8” Long 3/8”-16 screws with washers as shown with a 9/16” wrench and socket driver

Step 3:

- Install the (4) 3/8” Washers and hex nuts as shown

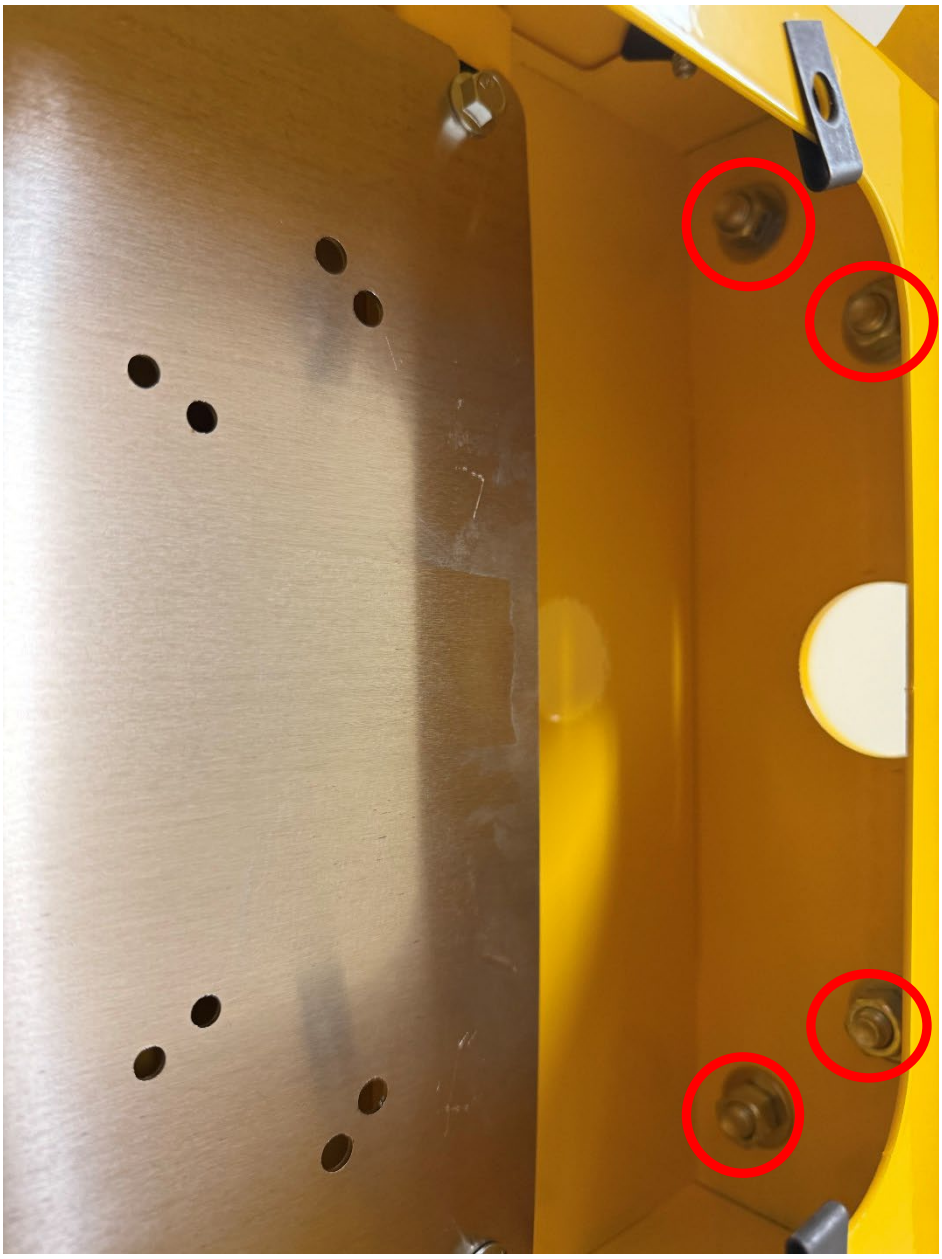

Step 4:

- Repeat Steps 1-3 at the opposite end of the Industrial Portal to install the other flush mount bracket
- Attach to wall